


VALVOLE (pale interne in gomma alimentare "bianca")

VALVES (gasket alimenta white)



GRAVITY SPOUTING PIPES POWDER COATED STEEL
RAL 9010 ALIMENTARE CERTIFICATO/ RAL 9010 FOOD CERTIFIED

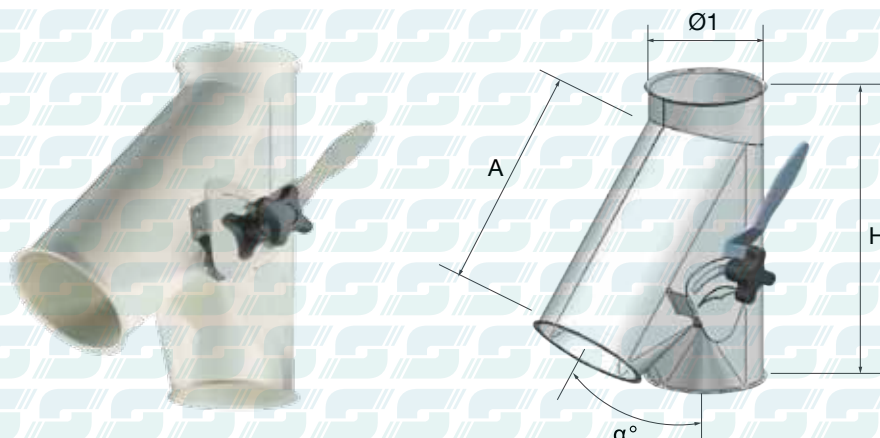

Valvole Asimmetriche 30° / Comando Manuale - Diverter valve asymmetric 30° hand operated

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS30MA-105	105	335	275	12/10	
VAS30MA-120	120	405	340		
VAS30MA-150	150	460	395		
VAS30MA-200	200	565	480		

Valvole Asimmetriche 35° / Comando Manuale - Diverter valve asymmetric 35° hand operated

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS35MA-105	105	305	240	12/10	
VAS35MA-120	120	370	300		
VAS35MA-150	150	420	345		
VAS35MA-200	200	510	415		

Valvole Asimmetriche 40° / Comando Manuale - Diverter valve asymmetric 40° hand operated

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS40MA-105	105	280	210	12/10	
VAS40MA-120	120	345	270		
VAS40MA-150	150	390	305		
VAS40MA-200	200	470	365		

Valvole Asimmetriche 45° / Comando Manuale - Diverter valve asymmetric 45° hand operated

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS45MA-105	105	260	190	12/10	
VAS45MA-120	120	320	240		
VAS45MA-150	150	365	270		
VAS45MA-200	200	435	320		

Accessori esterni per il movimento della pala in acciaio inox AISI 304. / External accessories for the blade in stainless steel AISI 304.
Pala interna in acciaio inox AISI 304 BA. / Inner blade in stainless steel 2P reflective.

Su richiesta: esecuzione Ø 250 mm e Ø 300 mm.
On request: execution Ø 250 mm e Ø 300 mm.