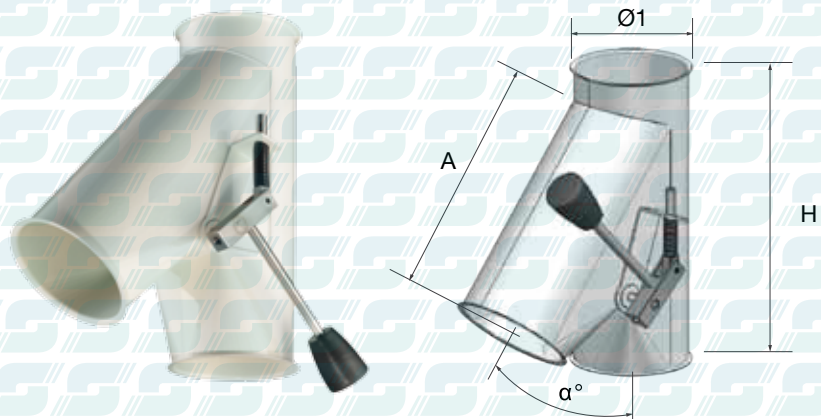


VALVOLE (pale interne in gomma alimentare "bianca")

VALVES (gasket alimenta white)

GRAVITY SPOUTING PIPES POWDER COATED STEEL
RAL 9010 ALIMENTARE CERTIFICATO/ RAL 9010 FOOD CERTIFIED**Valvole Asimmetriche 30° / Comando a Molla** - *Diverter valve asymmetric 30° hand operated with spring*

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS30MO-105	105	335	275	12/10	
VAS30MO-120	120	405	340		
VAS30MO-150	150	460	395		
VAS30MO-200	200	565	480		

Valvole Asimmetriche 35° / Comando a Molla - *Diverter valve asymmetric 35° hand operated with spring*

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS35MO-105	105	305	240	12/10	
VAS35MO-120	120	370	300		
VAS35MO-150	150	420	345		
VAS35MO-200	200	510	415		

Valvole Asimmetriche 40° / Comando a Molla - *Diverter valve asymmetric 40° hand operated with spring*

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS40MO-105	105	280	210	12/10	
VAS40MO-120	120	345	270		
VAS40MO-150	150	390	305		
VAS40MO-200	200	470	365		

Valvole Asimmetriche 45° / Comando a Molla - *Diverter valve asymmetric 45° hand operated with spring*

Cod. Art.	Ø1 [mm]	H [mm]	A [mm]	Sp. [mm]	Prezzo Unitario €
VAS45MO-105	105	260	190	12/10	
VAS45MO-120	120	320	240		
VAS45MO-150	150	365	270		
VAS45MO-200	200	435	320		

Accessori esterni per il movimento della pala in acciaio inox AISI 304. / External accessories for the blade in stainless steel AISI 304.
Pala interna in acciaio inox AISI 304 BA. / Inner blade in stainless steel 2P reflective.

Su richiesta: esecuzione Ø 250 mm e Ø 300 mm.
On request: execution Ø 250 mm e Ø 300 mm.